


TOGGLE MODULE / RETRACTIVE

ACTION: RETRACTIVE

RANGE: TOGGLE MODULE

A retractive toggle module for use with Buster + Punch toggle switches in the Australian and New Zealand region. Combine with Buster + Punch plates, detail kits and other modules to create your perfect switch. Only compatible with CDM-142038 250W Retractive Dimmer modules, and for installation with dedicated retractive-enabled lighting circuits.



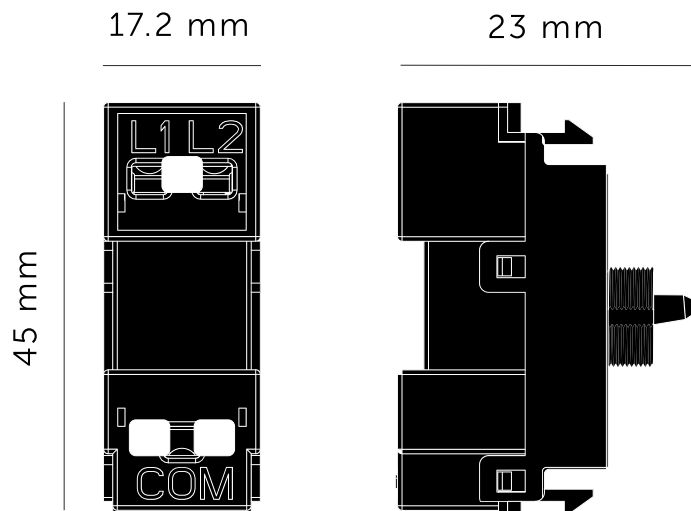

SPECIFICATIONS

Switching: On/Off retractive / momentary toggle module
Input: 220-250VAC
Load: 10AX
Compatibility: For use with retractive wiring + dimmers. Not compatible with standard wiring. Please consult user manual.
For use in Australia & New Zealand
Certification: SAA-221305-EA, AS 3133:2020
Testing includes: Endurance - 12,000 cycles @ 100% max load
Resistance to heat - 125°C
Dielectric voltage withstand - 2000V & 3000V
Not suitable for fans, motors or any other type of large inductive load. Consult an electrician for use with contactors.
Product has been tested with major smart home modules using momentary switch inputs.

FINISH & SKU NUMBERS

sku:	finish:	size:
GZTM-013291	● black	N/A

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

INCLUDED

1 x Retractive Toggle Module

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.




ELECTRICITY


Retractive Toggle Module / 2 Way / 10A

GZTM-013291

(Momentary Switch)

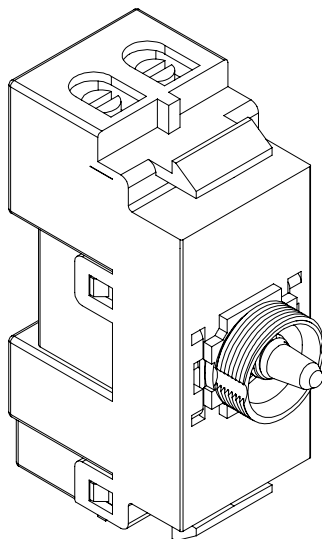

FOR ASSEMBLY, REFER TO [MODULAR PLATE ASSEMBLY MANUAL](#)



THIS IS A RETRACTIVE TOGGLE SWITCH, COMPATIBLE WITH INDUSTRY-STANDARD SMART CONTROL MODULES & DIMMERS WITH A RETRACTIVE INPUT

BUSTERANDPUNCH.COM / AU

L0228



EN TECHNICAL SPECIFICATION Retractive Switch (Momentary Switch)

10A 220 - 250V AC

IMPORTANT NOTES

READ BEFORE INSTALLATION

1. All wiring and installation must adhere to the latest local and national regulations.
2. This product must be installed by a qualified and competent electrician. Turn off the power at the breaker prior to installing this product.
3. Do not exceed the rated power values.
4. Indoor use only.
5. To reduce the risk of discolouration or tarnishing, avoid installation on wet plaster.





AS 3133:2020 & AS/NZS 3100:2022 SAA-221305-EA

WARRANTY INFORMATION

The warranty period extends two (2) years from the date of the original purchase.

RECYCLING ELECTRICAL PRODUCTS

Buster and Punch encourages all its customers to make note of this symbol and avoid putting any waste electrical goods in your domestic waste bin or container. Please ensure you take your waste electrical goods to a suitable facility for disposal.

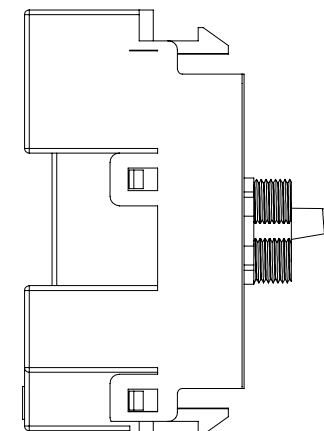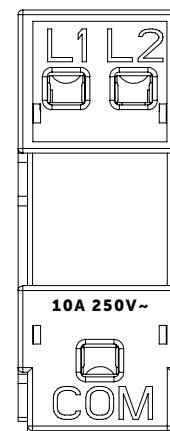

RETRACTIVE SWITCH

1




**BEFORE COMMENCING WORK,
ISOLATE THE MAINS POWER
SUPPLY AND REMOVE THE
FUSE BOX OR SWITCH OFF
THE CIRCUIT BREAKER IN
CONSUMER UNIT.**



2

Connect the wires as shown in appropriate wiring diagrams. Use green/yellow sleeving on earth conductors that are not insulated. Ensure terminals are properly tightened and no bare wire is visible. Push back unit into back box making sure conductors are not trapped.

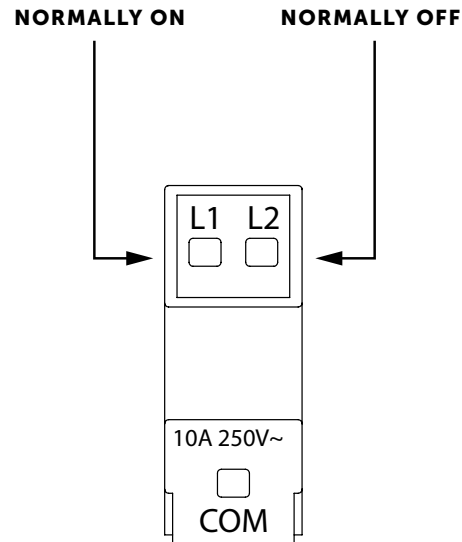


3

MULTIPLE LOCATION DIMMING

How to dim from multiple locations using Buster + Punch.

- Short Press when using CDM-142038 Retractive Dimmer module to turn lighting circuit on/off
- Long Press to cycle brightness of the circuit up / down Wherever you are using the Retractive Toggle Module.

NOT COMPATIBLE WITH STANDARD 2 WAY OR INTERMEDIATE TOGGLES OR STANDARD WIRING.

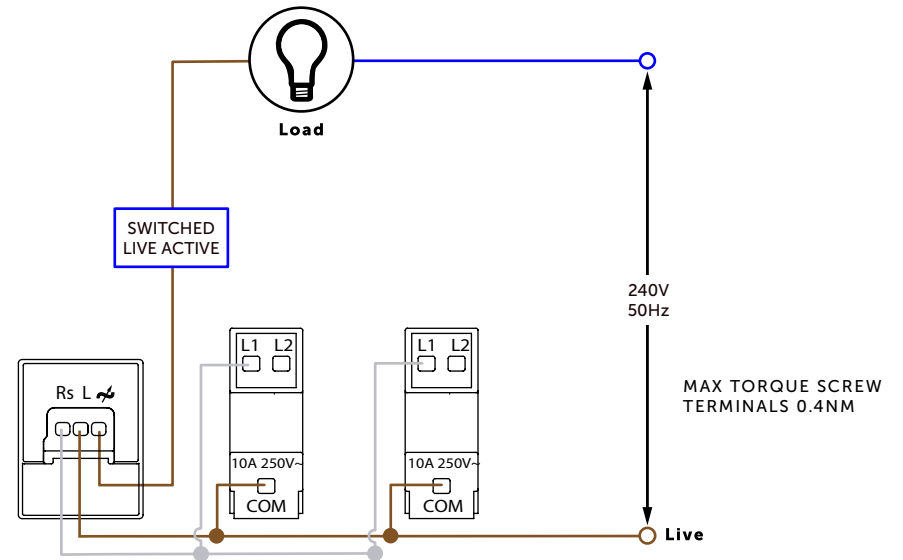

The Dimmer is always connected to Active / Live side of the load, you can have up to 10 GZTM-013291 Retractive Toggle Modules controlling one Retractive Dimmer (CDM-142038)