

## TOGGLE MODULE / 2 WAY

---

**ACTION: 2 WAY**


---

**RANGE: TOGGLE MODULE**

---

A standard 2-way toggle for use with Buster + Punch toggle switches in the Australian and New Zealand region. Combine with Buster + Punch plates, detail kits and other modules to create your perfect switch.



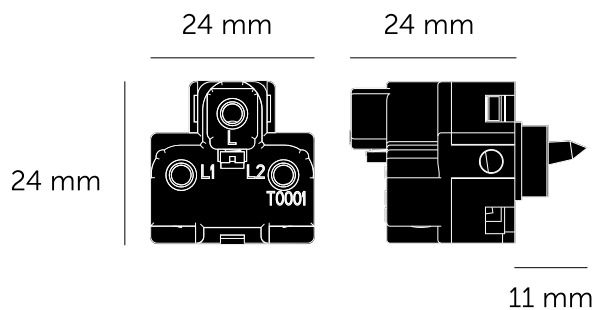

#### SPECIFICATIONS

Style: On / Off Toggle Switch  
Switching: 2 Way  
Input: 220-250VAC  
Load: 10AX  
Compatibility: For use with standard 1, 2 or 3 way switch circuits. Not compatible with Retractive Switching  
For Use In: Australia & New Zealand  
Compliant with - AS 3133:2020  
Certification: SAA-240105-EA  
Testing Includes: Endurance - 12,000 cycles @ 100% max load  
Resistance to Heat - 125C  
Dielectric Voltage Withstand - 2000V & 3000V  
Not Suitable for Fans, Motors or any other type of large inductive load. Consult an Electrician for use with Contactors.  
Product has been tested with major Smart Home Modules using Standard Switch inputs.

#### FINISH & SKU NUMBERS

sku:	finish:	size:
ZTM-023574	● black	N/A

#### CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

#### INCLUDED

1 x 2-way Toggle Module

#### PLEASE NOTE


DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.



## TOGGLE MODULE / 2 WAY

ZTM-023574 / T0001

### INSTALLATION MANUAL

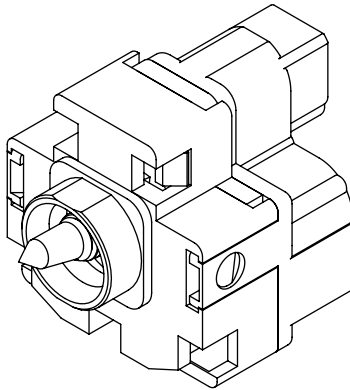

FOR ASSEMBLY, REFER TO [MODULAR PLATE ASSEMBLY MANUAL](#)



smart ready

THIS IS A STANDARD SWITCH. IT IS COMPATIBLE WITH INDUSTRY STANDARD SMART CONTROL MODULES & DIMMERS WITH A STANDARD SWITCH INPUT

BUSTERANDPUNCH.COM  
L0068.2



## EN TECHNICAL SPECIFICATION

### 2 WAY TOGGLE SWITCH / MODULE

250VAC / 10A Max / Class II

## IMPORTANT NOTES

### READ BEFORE INSTALLATION

1. All wiring and installation must adhere to the latest local and national regulations.
2. Must be installed by a qualified and competent electrician.
3. Do not exceed the rated power values.
4. Indoor use only.
5. To reduce the risk of discolouration or tarnishing, avoid installation on wet plaster.



AS 3133:2020 & AS/NZS 3100:2022 SAA-230472-EA

## WARRANTY INFORMATION

The warranty period extends two (2) years from the date of the original purchase.

## RECYCLING ELECTRICAL PRODUCTS

Buster and Punch encourages all its customers to make note of this symbol and avoid putting any waste electrical goods in your domestic waste bin or container. Please ensure you take your waste electrical goods to a suitable facility for disposal.



**1**

### TURN OFF POWER.


Before commencing work, isolate the mains power supply and remove the fuse box or switch off the circuit breaker in consumer unit.




### CAUTION:

Verify power supply is OFF before proceeding.


## 2 a) 1 WAY WIRING

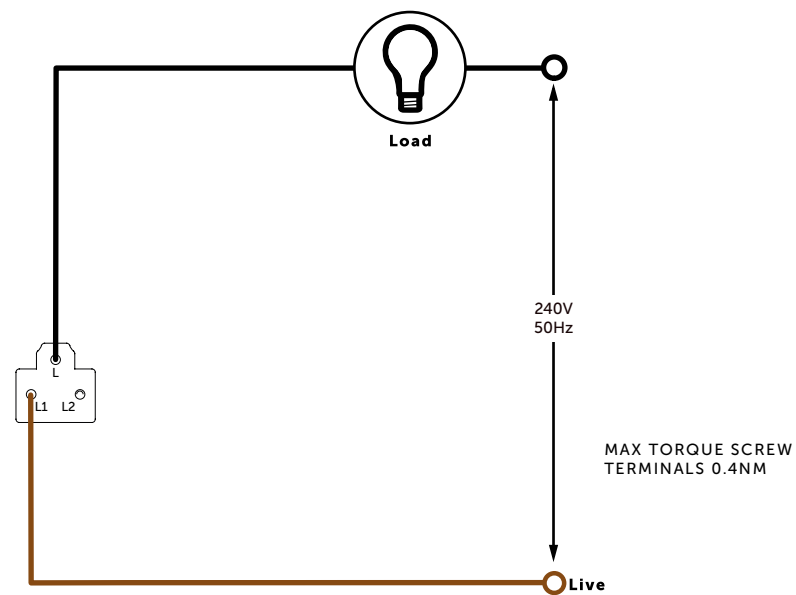

## 2 b) 2 WAY WIRING

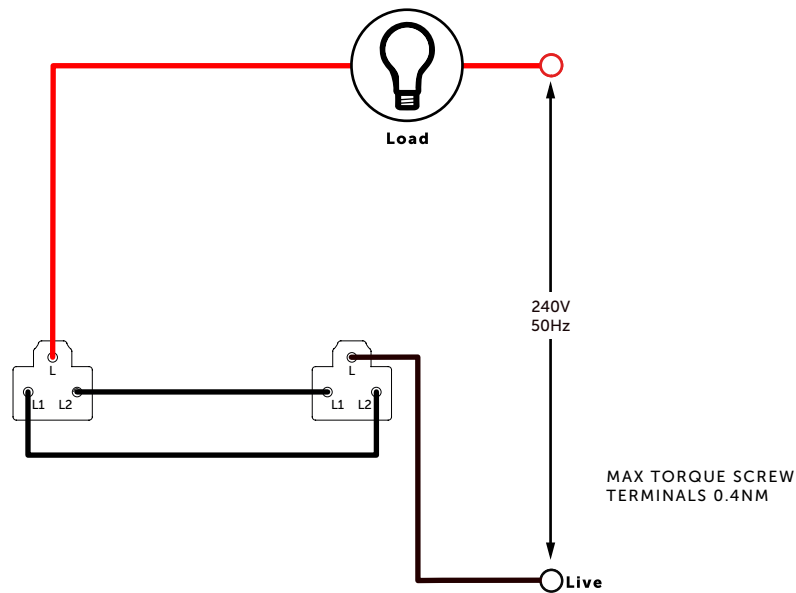

## 4 c) 3 WAY WIRING

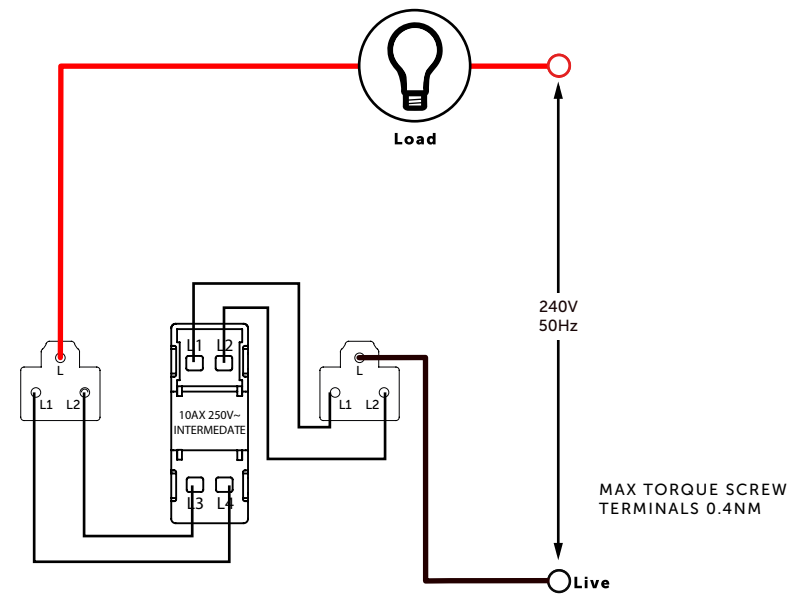

[end. **ORDINARY** ]